



Features

- Small Body Outline Dimensions:
0.039"x 0.024"(1.0 mm x 0.60 mm)
- Protects one I/O or Power Line
- Low Clamping Voltage
- Working Voltage: 5V
- Low Leakage Current
- Response Time is Typically < 1 ns

IEC COMPATIBILITY (EN61000-4)

- IEC 61000-4-2 (ESD) $\pm 30\text{kV}$ (air), $\pm 30\text{kV}$ (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 9A (8/20 μs)



Mechanical Characteristics

- DFN1006-2L package
- Molding compound flammability rating:
UL 94V-0
- Marking : Marking Code
- RoHS Compliant

Applications

- Cellular Handsets & Accessories
- Personal Digital Assistants (PDAs)
- Notebooks & Handhelds
- Portable Instrumentation
- Digital Cameras
- MP3 Player

Schematic & PIN Configuration

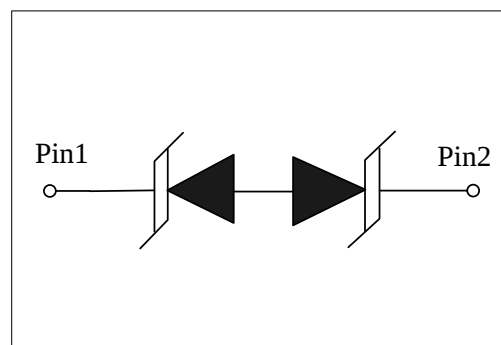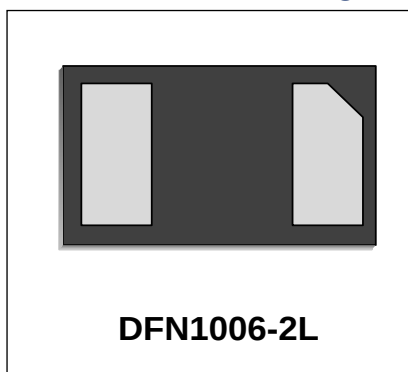


Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power ($t_p = 8/20\mu s$)	P_{PP}	80	W
Peak Pulse Current ($t_p = 8/20\mu s$)	I_{PP}	9	A
Operating Temperature	T_J	-55 to + 125	°C
Storage Temperature	T_{STG}	-55 to +150	°C

Electrical Parameters (T=25°C)

Symbol	Parameter
I_{PP}	Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Reverse Stand-Off Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current

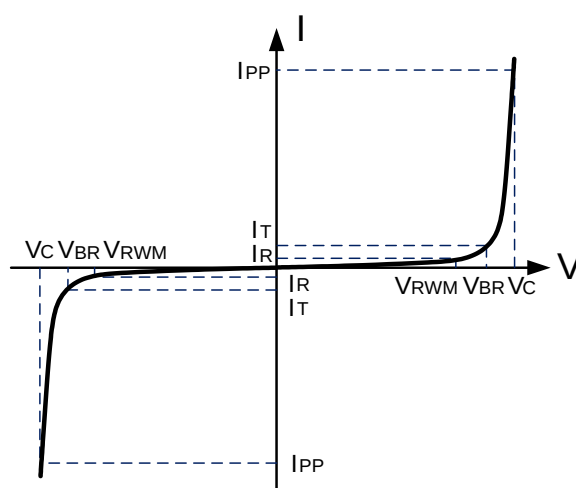

Electrical Characteristics

Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				5	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	5.6			V
Reverse Leakage Current	I_R	$V_{RWM}=5V$, $T=25^{\circ}C$			200	nA
Clamping Voltage	V_C	$I_{PP}=1A$, $t_p=8/20\mu s$			7.5	V
Clamping Voltage	V_C	$I_{PP}=9A$, $t_p=8/20\mu s$		7.5	9	V
Dynamic Resistance ^{1,2}	R_{DYN}	$TLP=0.2/100ns$		0.2		Ω
ESD Clamping Voltage ¹	V_C	$I_{PP} = 4A$, $t_p = 0.2/100ns$ (TLP)		6.3		V
ESD Clamping Voltage ¹	V_C	$I_{PP} = 16A$, $t_p = 0.2/100ns$ (TLP)		8.9		V
Junction Capacitance	C_j	$VR = 0V$, $f = 1MHz$		14	18	pF

Notes : 1、 TLP Setting : $t_p=100ns$, $t_r=0.2ns$, I_{TLP} and V_{TLP} sample window: $t_1=70ns$ to $t_2=90ns$.

2、 Dynamic resistance calculated from $I_{PP}=4A$ to $I_{PP}=16A$ using “Best Fit”.

Typical Characteristics

Figure 1: Peak Pulse Power Vs Pulse Time

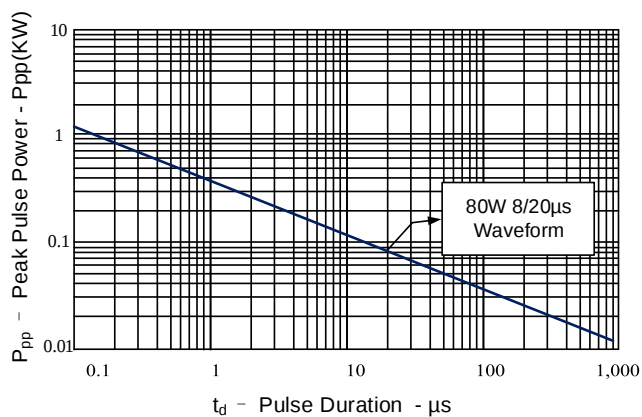


Figure 2: Power Derating Curve

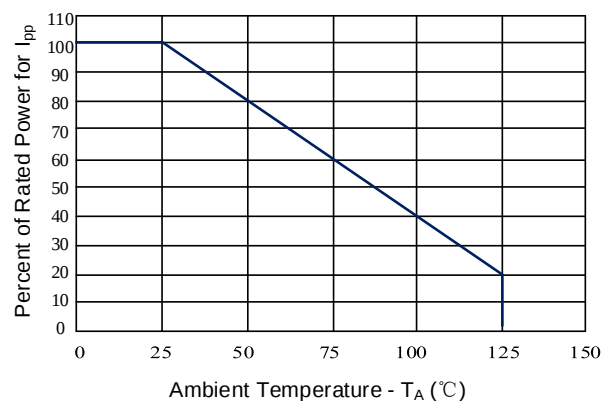


Figure 3: Clamping Voltage vs. Peak Pulse Current

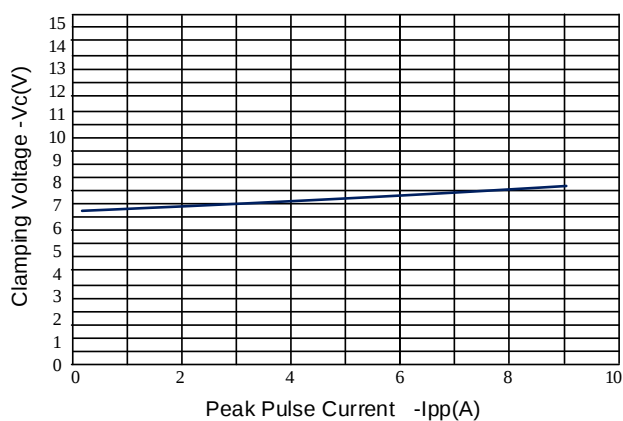


Figure 4: Normalized Junction Capacitance vs. Reverse Voltage

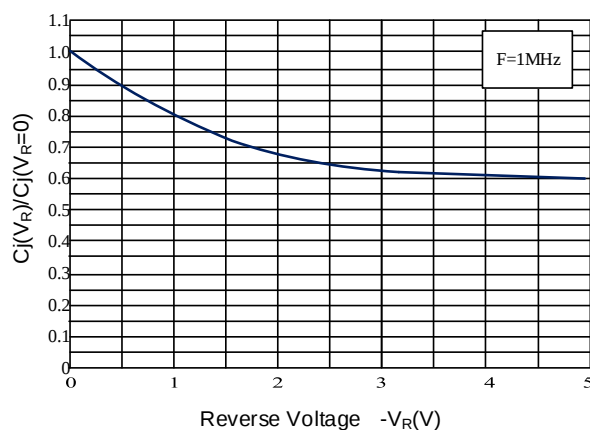


Figure 5: TLP Positive I-V Curve



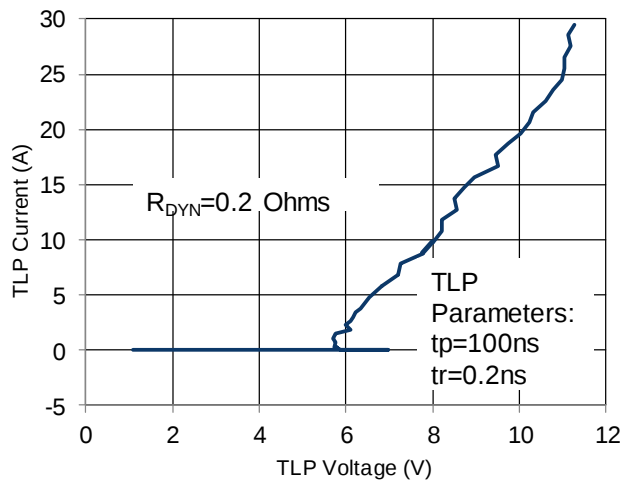


Figure 6: TLP Negative I-V Curve

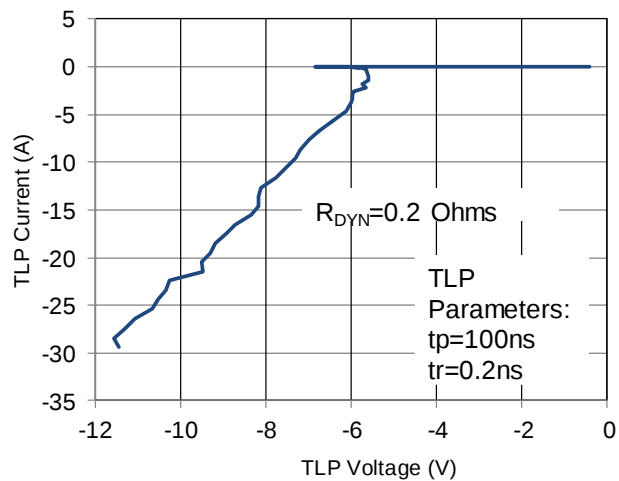

Outline Drawing –DFN1006-2L

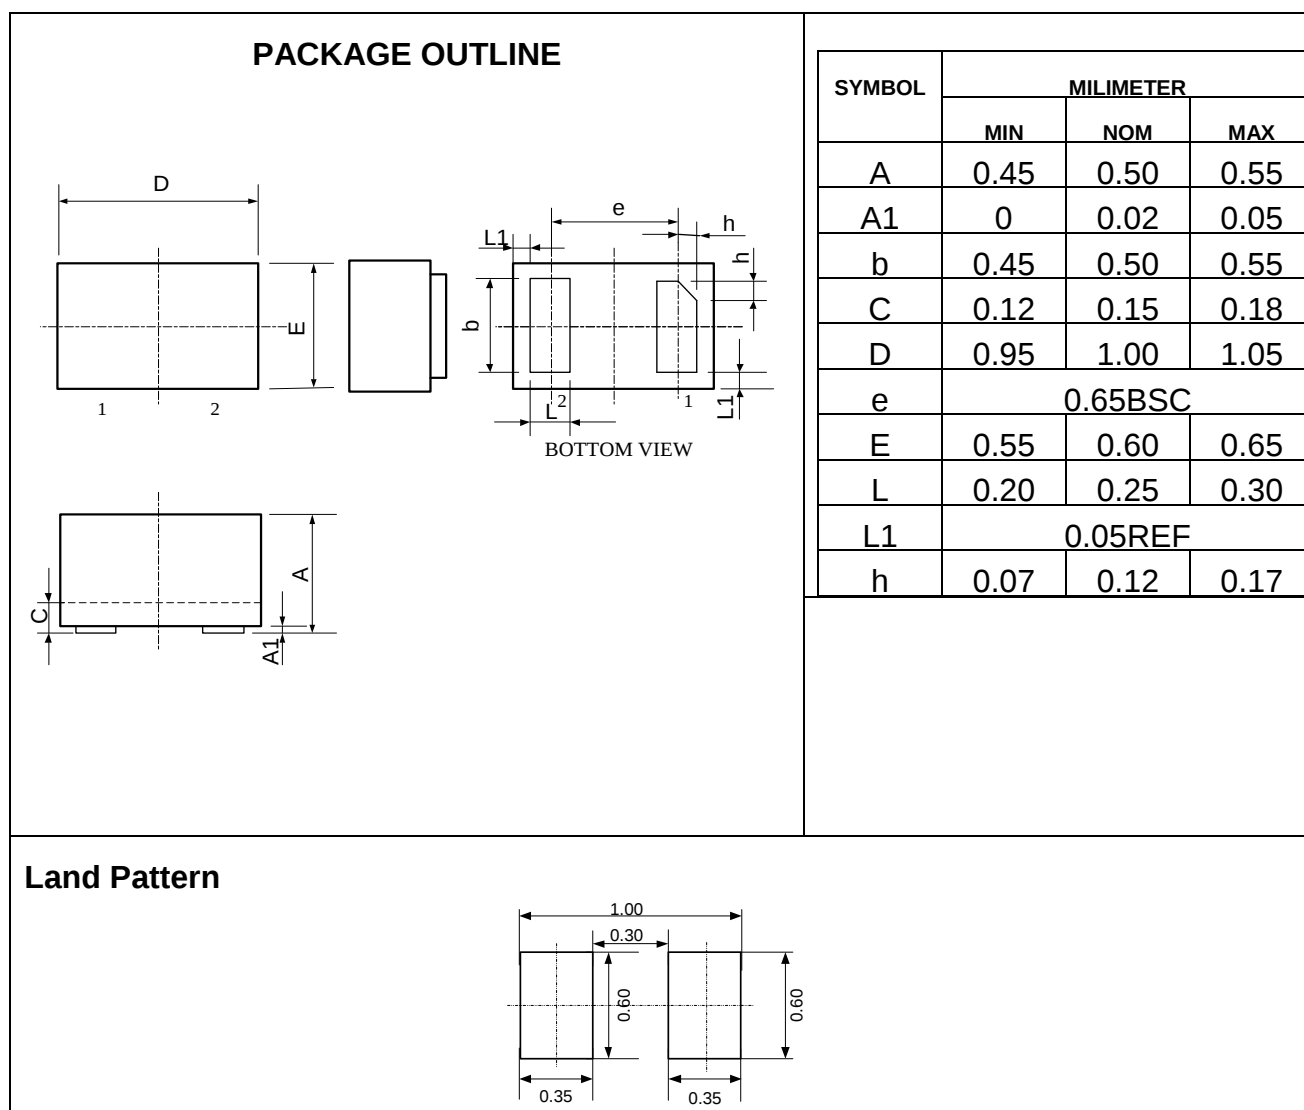

Marking Codes

Part Number	E05DFBH	Marking Code	PB
-------------	---------	--------------	----

Package Information

Qty: 10k/Reel

Revision History

NO.	Version	Date	Revision Item	Revision History
1	1.0	2018-08-23	Release Version	