




Transient Voltage Suppressor

Features

- 720 Watts Peak Pulse Power per Line ($t_p=8/20\mu s$)
- Small Body Outline Dimensions
- Protects one I/O or power line
- Working Voltage: 9V
- Low Leakage Current

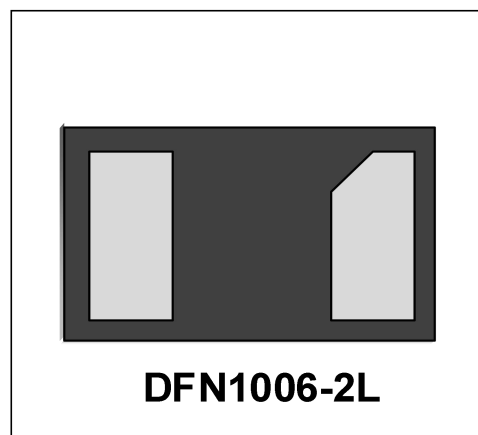

IEC COMPATIBILITY (EN61000-4)

- IEC 61000-4-2 (ESD) $\pm 30kV$ (air), $\pm 30kV$ (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 40A (8/20 μs)


Mechanical Characteristics

- DFN1006-2L package
- Marking : Marking Code
- Packaging : Tape and Reel
- RoHS Compliant
- MSL1

Applications

- Cellular Handsets & Accessories
- Personal Digital Assistants (PDAs)
- Notebooks & Handhelds
- Portable Instrumentation
- Digital Cameras
- MP3 Players

Schematic & PIN Configuration

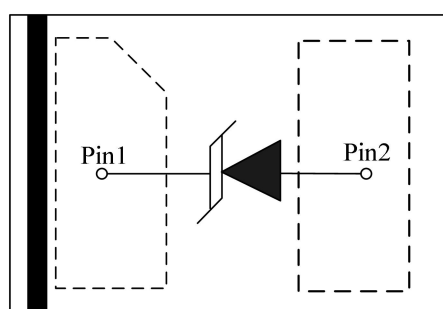


(TOP VIEW)

Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power ($t_p = 8/20\mu s$)	P_{PP}	720	W
Peak Pulse Current ($t_p = 8/20\mu s$)	I_{PP}	40	A
Operating Temperature	T_J	-55 to + 125	°C
Storage Temperature	T_{STG}	-55 to +150	°C

Electrical Parameters (T=25°C)

Symbol	Parameter
I_{PP}	Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Reverse Stand-Off Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_F	Forward Current
V_F	Forward Voltage @ I_F

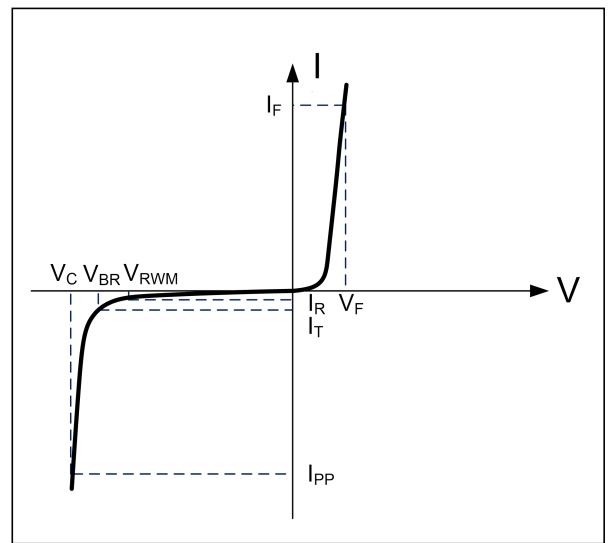

Electrical Characteristics

Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				9	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	9.5			V
Reverse Leakage Current	I_R	$V_{RWM}=9V, T=25^\circ C$			200	nA
Clamping Voltage	V_C	$I_{PP}=40A, t_p=8/20\mu s$		15.5	18	V
Dynamic Resistance ^{1,2}	R_{DYN}	$TLP=0.2/100ns$		0.09		Ω
ESD Clamping Voltage ¹	V_C	$I_{PP} = 4A,$ $t_p = 0.2/100ns$ (TLP)		10.8		V
ESD Clamping Voltage ¹	V_C	$I_{PP} = 16A,$ $t_p = 0.2/100ns$ (TLP)		11.8		V
Junction Capacitance	C_j	$V_R=0V, f=1MHz$		260	300	pF

Notes : 1、TLP Setting : $t_p=100ns, t_r=0.2ns, I_{TLP}$ and V_{TLP} sample window: $t_1=70ns$ to $t_2=90ns$.

2、Dynamic resistance calculated from $I_{PP}=4A$ to $I_{PP}=16A$ using "Best Fit".

Typical Characteristics

Figure 1: Peak Pulse Power Vs Pulse Time

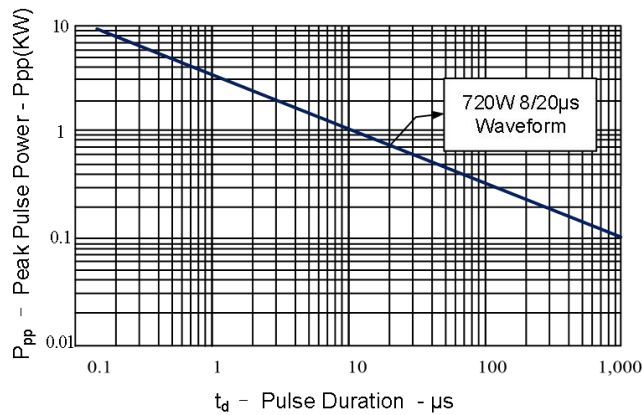


Figure 2: Power Derating Curve

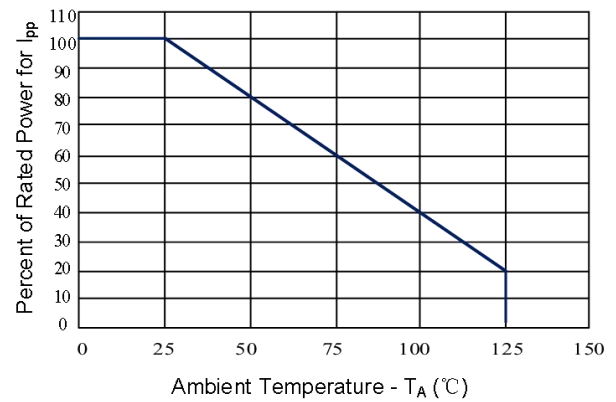


Figure 3: Clamping Voltage vs. Peak Pulse Current

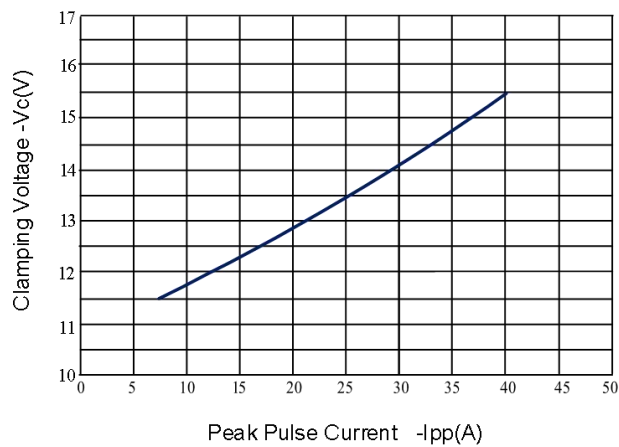


Figure 4: Normalized Junction Capacitance vs. Reverse Voltage

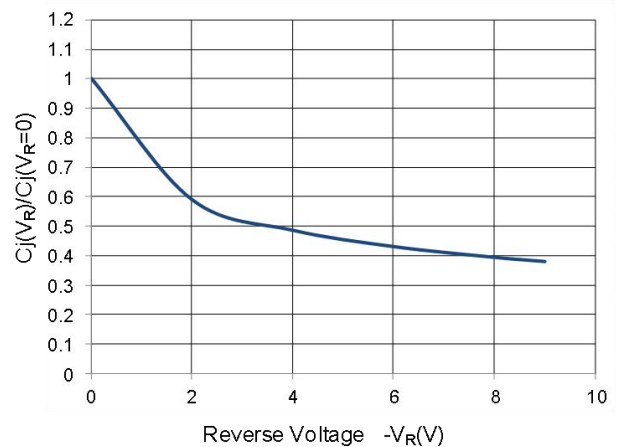


Figure 5: 8/20μs Pulse Waveform



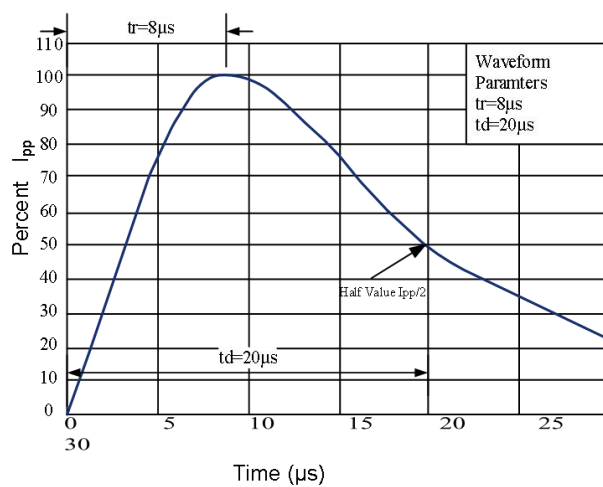


Figure 6: TLP I-V Curve

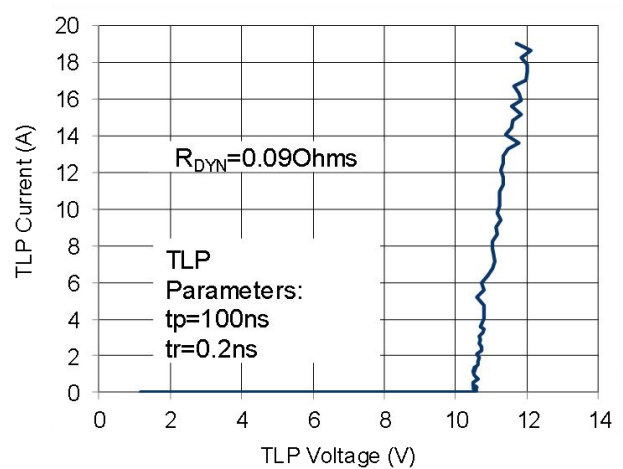


Soldering Parameters

Parameter		Value
Reflow Condition		Pb – Free assembly
Pre Heat	Temperature Min ($T_{S(min)}$)	150°C
	Temperature Max ($T_{S(max)}$)	200°C
	Time (min to max) (T_S)	60 ~190 secs
Average ramp up rate (Liquidus Temp) (T_L) to peak		5°C/second max
$T_{S(max)}$ to T_L ——Ramp-up Rate		5°C/second max
Reflow	Temperature (T_L) (Liquidus)	217°C
	Temperature (T_L)	60 ~150 seconds
Peak Temperature (T_P)		260+0/-5 °C
Time within actual peak Temperature (T_P)		20 ~ 40 seconds
Ramp-down Rate		5°C/second max
Time 25°C to peak Temperature (T_P)		8 minutes Max.
Do not exceed		280°C

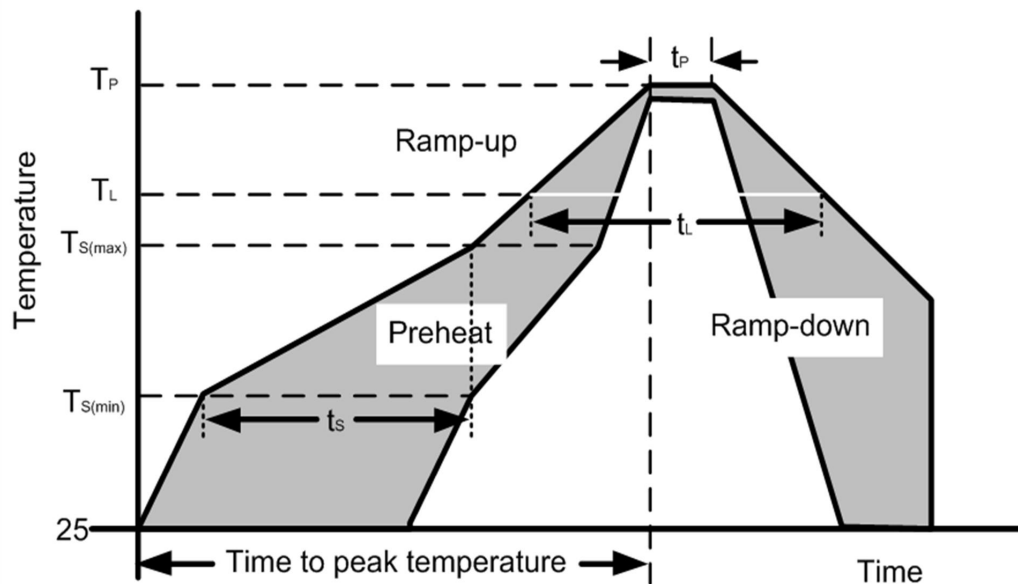

Outline Drawing –DFN1006-2L

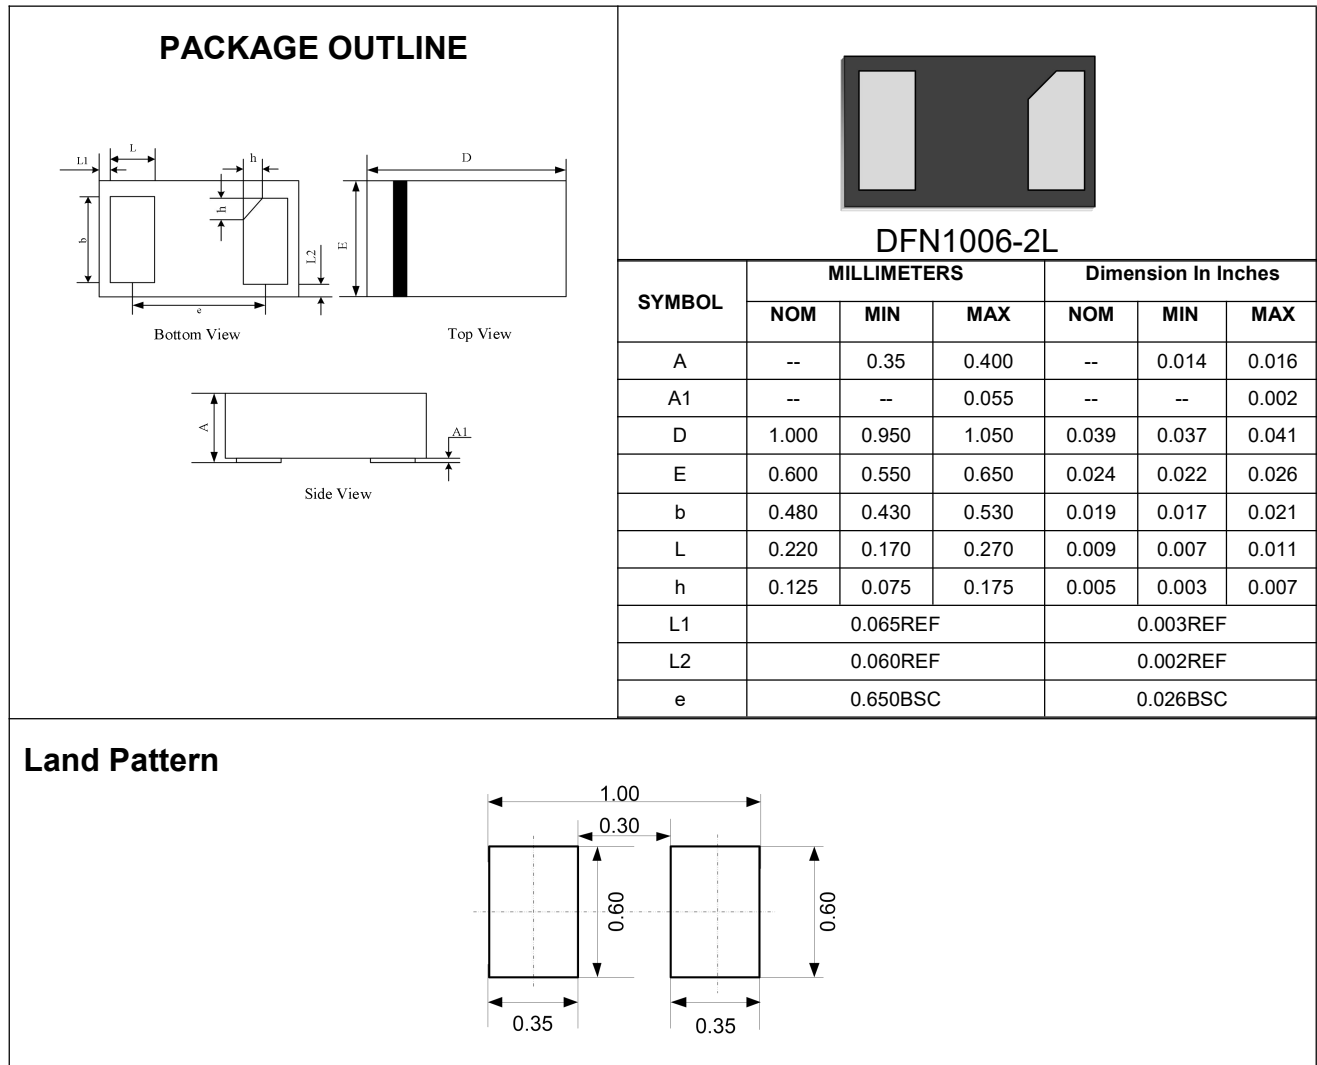


Marking Codes

Part Number	Marking Code
ES09DFX	1 NVX 2

Package Information

Qty: 10k/Reel

Tape Information

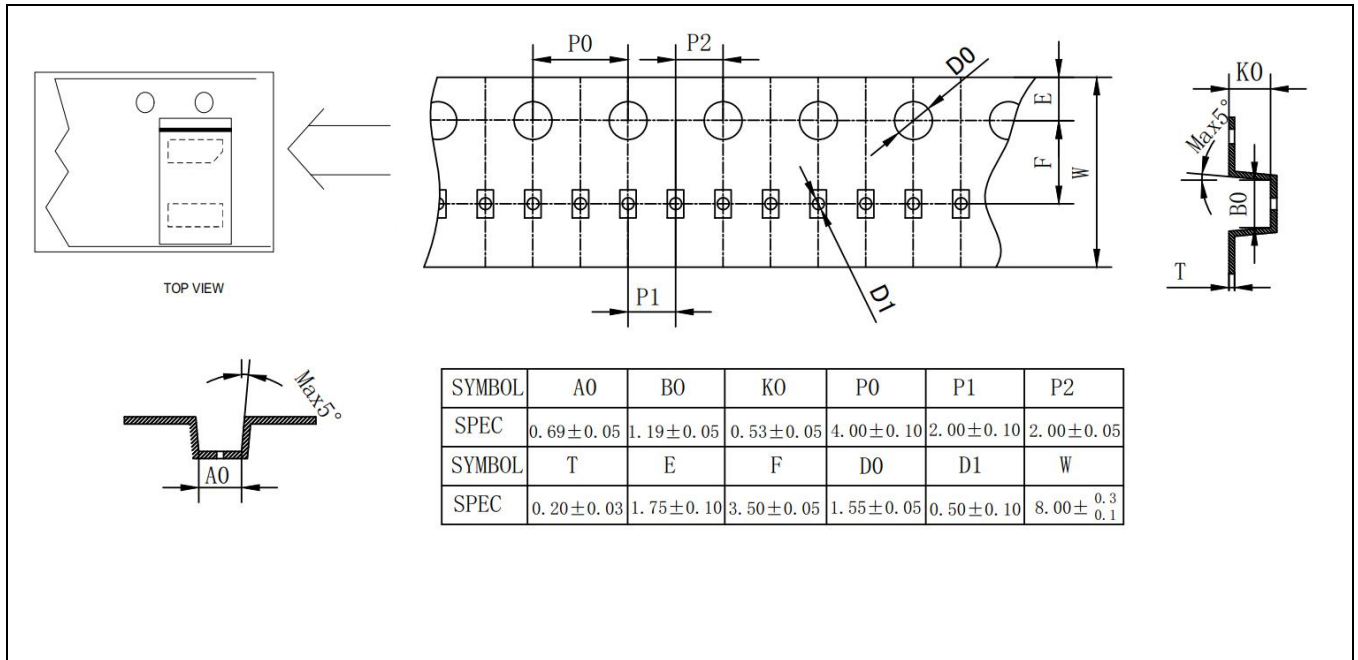

Revision History

No.	Version	Date	Revision Item	Request	Function and characteristic checking	Package dimension checking	Typos checking
1	1.0	2020-04-16	Released Version	Qi Shu Kun	Yin Peng	Ge Zheng Bing	Liu Jia Ying
2	1.1	2020-10-09	Update parameter more close to EVB evaluation	Qi Shu Kun	Yin Peng	Ge Zheng Bing	Liu Jia Ying